

M750-BS Bottom Seal Machine



Features

- Easy changeover without disconnection of thermocouples or heaters. Quick change sealing dies.
- Servo driven, multiple tension zone web transport for maximum web control and quality production
- Continuous 4-edge sealer with easy handwheel adjustment.
- Independently driven servo cross sealers for reduced set-up time.
- Servo Flying knife reduces pouch cold blocking. Blade replacements are easy and inexpensive.
- Clamp stacking for precise stack control.
- Allen-Bradley Contrologix platform with color touchscreen.
- Seals PE and PE/PA/PET laminations and co-extruded material as well as LDPE with co-ex film for bottom seal bags.


M750-BS Bottom Seal Machine

The M750-BS Bottom Seal Machine is configured to produce Heavy Wall pouches and bags. Hudson-Sharp has been an industry leader in the Heavy Wall pouch machine market for decades.

Optional Attachments:


- Gusset Pre-Sealer
- Header Sealer
- Angle Sealer
- Needle Punches
- Center back seam sealer
- Seal cooling
- Stack assist

Bag Options

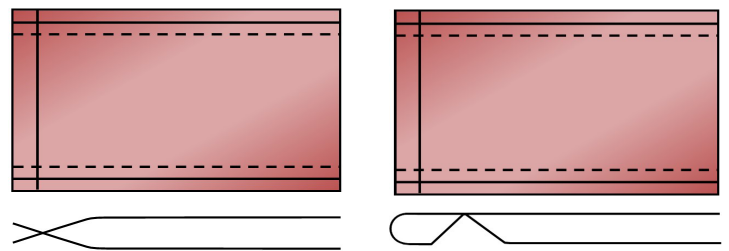

Bottom Seal

Header

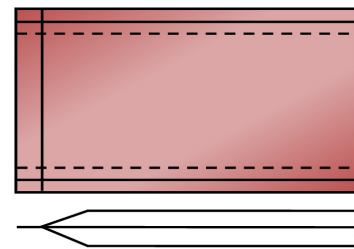

Side Gusset Bottom Seal Pouch

Product Specifications

| | |
|---------------------|---|
| Machine Speed | 120 cpm |
| Machine Width | 750 mm (30") |
| Sealing Width | 710 mm (28") |
| K-Seal Paten Length | 610 mm (24") |
| Max Gusset Depth | up to 100 mm (4") |
| Electrical | 480 Volt/60 cycle/3 Phase |
| Materials | Films used for heavy wall pouch application |

Note: Standard voltage shown, other voltage available

Hudson-Sharp 750HW Heavy Wall Machine_2019 - USA

Hudson-Sharp

975 Lombardi Ave.
Green Bay, WI 54304 USA

t. +1 (920) 494-4571
hudsonsharp.com

